


1180x80



Cable Ø 5-7,3 mm

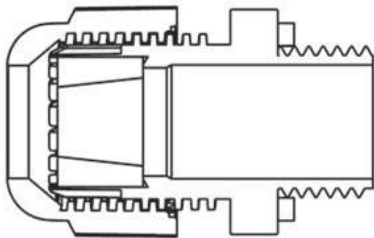

Ref.	Wattios	Unit in continuous
00440	40	<40*

**Ref.**

**00440**

Colección / Collection / Collection	Industrial. PRO Professional LED
Descripción / Description / Description	Pantalla Estanca LED LED Waterproof Screen Panneau LED Étanche

**Características Luminaria / Light Data Sheet /  
Caractéristiques de la Luminaire**

Material / Material / Matériau	ABS		
Material Difusor / Difusor Material / Matériau Diffuseur	PC		
Acabado Difusor / Diffuser Finish/ Touche Finale du Diffuseur	Ácido / Acid / Acide		
Colores / Colours / Couleurs	90 Blanco Técnico / Technical White / Blanc Technique		
Vatios / Watts / Watts	40W		
Lúmens / Lumens / Lumens	Color T. <sup>a</sup>	Useful Lm	Chip Lm
	4000K	3478 lm	4800 lm
	6500K	4205 lm	4800 lm
Grados Apertura / Opening Angle / Angle d'ouverture	120°		
IP	IP65		
IK	08		
Tiempo de Uso (h/día) / Working Time (h/day) / Temps d'utilisation (h/jour)	12-14		
On/Off	15.000		
Temperatura de Funcionamiento (Ta) / Working Temperature (Ta) / Température de Fonctionnement (Ta)	-25°C to +40°C		
Humedad de Funcionamiento / Working Humidity / Humidité de Fonctionnement	20-80% RH		
Peso / Weight / Poids	1,4 Kg		
Cantidad / Pieces / Quantité	1/ 12		

**Características del Chip / Chip Data Sheet /  
Caractéristiques de la Puce**

Marca / Brand / Marque	SANAN
Tipo / Type / Type	SMD 2835
L70 B10	60.000 h
SDCM (Mac Adam)	5
EN62471	RG0
Eficiencia Nominal / Nominal Efficiency / Efficacité Nominal	120 Lm/W (4000K)

**Características Driver / Driver Data Sheet /  
Caractéristiques de l'Alimentateur**

Ref.	Driver	Voltaje de Entrada Input Voltage Tension d'Entrée	FP PF FP	Garantía Warranty Garantie	Intensidad de Funcionamiento Working Current Courant de Fonctionnement	Flicker
00440-198_-	ON-OFF. Non Dimmable	AC110-240V 50/60Hz	>0,9	3	360 mA	Not Free

## Colores / Colours / Couleurs



90 Blanco Técnico / Technical White  
/ Blanc Technique

## Productos Relacionados / Related Products / Produits Associés



00420





00436




00450

## Continuous connection



Double connector/Both sides

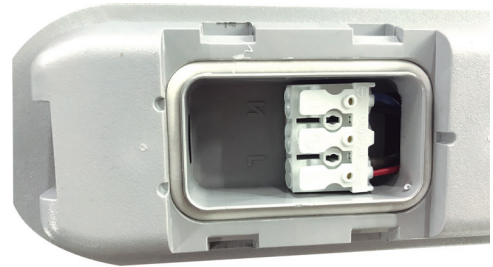

Double fast connector

## Documentos / Documents / Des documents

Declaración de Conformidad UE / EU Declaration of Conformity / Déclaration de Conformité UE

<http://www.jisoiluminacion.es/CE/CE-WATERPROOF-SCREEN.pdf>

Instrucciones de Instalación / Installation Instructions / Instructions d'Installation

<http://www.jisoiluminacion.es/Instrucciones/Instrucciones-00420-00440-00450-ES-EN.pdf>

Ficheros Fotométricos LDT / Photometrics File LDT / Fichier Photométrique LDT

[http://www.jisoiluminacion.es/Ficheros\\_LDT/00440-4000K.ltd.zip](http://www.jisoiluminacion.es/Ficheros_LDT/00440-4000K.ltd.zip)

Ficheros Fotométricos IES / Photometrics File IES / Fichier Photométrique IES

[http://www.jisoiluminacion.es/Ficheros\\_IES/00440-4000K.IES.zip](http://www.jisoiluminacion.es/Ficheros_IES/00440-4000K.IES.zip)

Etiqueta Energética / Energy Label / Label Énergétique

[http://jisoiluminacion.es/EE/EE\\_00440.pdf](http://jisoiluminacion.es/EE/EE_00440.pdf)