



Ref.

25015


Colección / Collection / Collection	Technical Indoor. PRO Professional LED
Descripción / Description / Description	Aplicador LED con Sensor Infrarrojo Infrared LED Sensor Lamp Wall Applique LED avec Capteur Infrarouge

**Características Luminaria / Light Data Sheet /
Caractéristiques de la Luminaire**

Material / Material / Matériau	Aluminio / Aluminium / Aluminium		
Material Difusor / Difusor Material / Matériau Diffuseur	PC PMMA		
Acabado Difusor / Diffuser Finish/ Touche Finale du Diffuseur	Ácido / Acid / Acide		
Colores / Colours / Couleurs	90 Blanco Técnico / Technical White / Blanc Technique		
Vatios / Watts / Watts	15W		
Lúmens / Lumens / Lumens	Color T. ^a	Useful Lm	Chip Lm
	4000K	1050 lm	1800 lm
IP	IP20		
Temperatura de Funcionamiento (Ta) / Working Temperature (Ta) / Température de Fonctionnement (Ta)	-20°C to +45°C		
Humedad de Funcionamiento / Working Humidity / Humidité de Fonctionnement	20-90%RH		
Peso / Weight / Poids	0,5 Kg		
Cantidad / Pieces / Quantité	1/ 10		

Características del Chip / Chip Data Sheet / Caractéristiques de la Puce

Marca / Brand / Marque	EPISTAR
Tipo / Type / Type	SMD 2835
L70B10	30.000 h
Eficiencia Nominal / Nominal Efficiency / Efficacité Nominal	120 Lm/W (4000K)

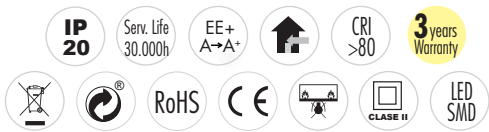

Características Driver / Driver Data Sheet / Caractéristiques de l'Alimentateur

Ref.	Driver	Voltaje de Entrada Input Voltage Tension d'Entrée	FP	Garantía Warranty Garantie
25015-996_-	ON-OFF. Non Dimmable	AC220-240V 50/60Hz	>0,5	3




Colores / Colours / Couleurs



90 Blanco Técnico / Technical White
/ Blanc Technique

Información del Sensor / Information Sensor / Informations de Capteur

Time Delay / Ambient Light (Day And Night): (Adjustable)

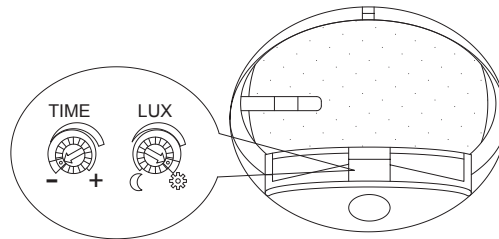

Height of installation: 1.8-2.5m Detection Distance: Max. 9m

Detection Range: 160° / 360°
 Detection Distance:
 Wall: max. 9,00m. (<24°C)
 Ceiling: max. 6,00m. (<24°C)
 Time Delay: (ADJUSTABLE)
 MIN.: 10 sec. +-3 sec.
 MAX.: 5 min. +-1 min.
 Ambient Light (Day / Night) (ADJUSTABLE): <3 lux-2000 lux
 Detection Motion Speed: 0.6 -1.5 m/s
 Installing Height:
 Wall: 1.8m-2.5m
 Ceiling: 2.2m- 4.00 m

Documentos / Documents / Des documents

Declaración de Conformidad UE / EU Declaration of Conformity / Déclaration de Conformité UE

<http://www.jisoiluminacion.es/CE/CE-LUMINAIRES-With-motion-detector.pdf>

Instrucciones de Instalación / Installation Instructions / Instructions d'Installation

<http://www.jisoiluminacion.es/Instrucciones/Instrucciones-25015-ES-EN.pdf>

Ficheros Fotométricos LDT / Photometrics File LDT / Fichier Photométrique LDT

http://www.jisoiluminacion.es/Ficheros_LDT/25015-4000K.ltd.zip

Ficheros Fotométricos IES / Photometrics File IES / Fichier Photométrique IES

http://www.jisoiluminacion.es/Ficheros_IES/25015-4000K.IES.zip

Etiqueta Energética / Energy Label / Label Énergétique

http://www.jisoiluminacion.es/EE/EE_25015.pdf