

Ref.

N200114. Krill

| | |
|---|--|
| Colección / Collection / Collection | Technical Indoor. PRO Professional |
| Descripción / Description / Description | Tira de Neón flexible LED Flex Neon Light Bande Neon |

**Características Luminaria / Light Data Sheet /
Caractéristiques de la Luminaire**

| | | |
|--|-----------------------|--------------|
| W/m | 14,4 | |
| Rollo / Roll / | 5 m | |
| Vatios / Watts / Watts | 72 | |
| Input Voltage | DC 24V | |
| Lúmens / Lumens / Lumens | Color T. ^a | Useful Lm/m |
| | 2700K* | 950 lm |
| | 3000K | 950 lm |
| | 4000K RGB | 1000 lm - |
| Grados Apertura / Opening Angle / Angle d'ouverture | 160° | |
| IP | 67 | |
| Tiempo de Uso (h/día) / Working Time (h/day) / Temps d'utilisation (h/jour) | 12/14h | |
| Temperatura de Funcionamiento (Ta) / Working Temperature (Ta) / Température de Fonctionnement (Ta) | -20°C to +45°C | |
| Humedad de Funcionamiento / Working Humidity / Humidité de Fonctionnement | 20-85% RH | |
| Peso / Weight / Poids | 0,80Kg | |
| Cantidad / Pieces / Quantité | 1/ 10 | |

**Características del Chip / Chip Data Sheet /
Caractéristiques de la Puce**

| | |
|------------------------|-------|
| Marca / Brand / Marque | SANAN |
| Tipo / Type / Type | SMD |


* On Reques / Bajo Pedido / Sur Demande

| Ref. | Chip | LED/m | Corte Cut x | Garantía Warranty Garantie | Power Supply | Input Voltage |
|---------------|------|-------|-------------------|----------------------------------|--------------|---------------|
| N200114-248_- | 2236 | 240 | 10 c,m | 3 | No | DC24V |
| N200114-24R- | 3535 | 120 | 5 c,m | 3 | No | DC24V |

Accesorios / Accessories / Accessoires




HCN01-T01
End cap




HCN01-F01
Clips



HCN01-C01
Splice connector
Single Colour





HCN01-C02
Connector.
Single Colour
Cable's length 150mm

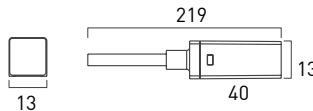

HCN01-C03
Single color
HCN01-C03R
RGB
Jumper Connector
Cable's length 150mm



HCN01-C02R
Connector RGB

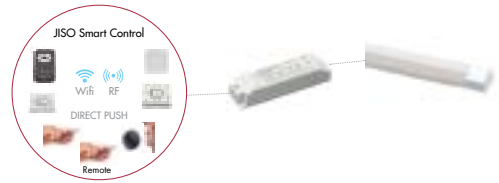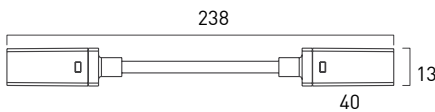


JISO Smart Control

Uniform&Seven light source with no LED "hotspots"
Top view (three-dimensional Emitting) more durable and flexible with 120mm minimum beging diameter
Easy instalation. Vertical Bending

Uniforme y sin problemas de visualización de puntos de luz.
Iluminación en parte superior (a tres caras). Más durabilidad y flexibilidad con diámetro mínimo de doblado 120mm.
Fácil instalación. Doblado vertical.

Uniforme et sans problèmes de visions des points de lumière.
Illumination vers le haut (en trois faces). Plus durable et flexible avec Diamètre minimal du plie 120mm.
Installation facile. Plie vertical.

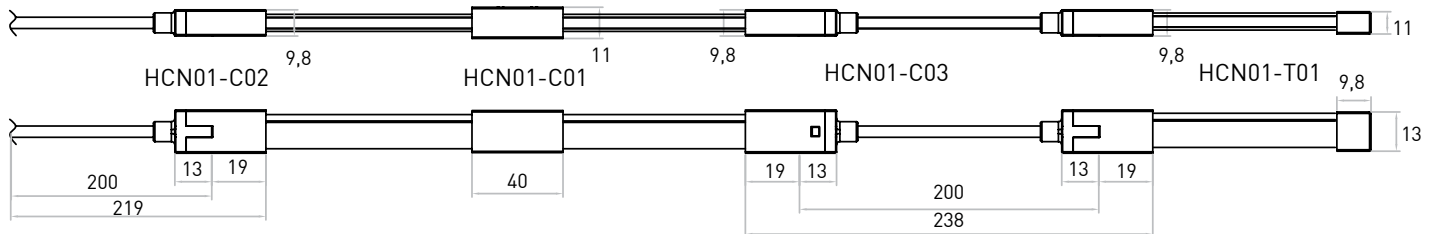

Documentos / Documents / Des documents

Declaración de Conformidad UE / EU Declaration of Conformity / Déclaration de Conformité UE

<http://www.jisoiluminacion.es/CE/CE-LED-STRIPS.pdf>

Instrucciones de Instalación / Installation Instructions / Instructions d'Installation

http://www.jisoiluminacion.es/Instrucciones/Instrucciones-N200114_Krill.pdf
http://www.jisoiluminacion.es/Instrucciones/Instrucciones-N200114RGB_Krill.pdf

Ficheros Fotométricos LDT / Photometrics File LDT / Fichier Photométrique LDT

http://www.jisoiluminacion.es/Ficheros_LDT/N200114.ltd.zip
http://www.jisoiluminacion.es/Ficheros_LDT/N200114RGB.ltd.zip

Ficheros Fotométricos IES / Photometrics File IES / Fichier Photométrique IES

http://www.jisoiluminacion.es/Ficheros_IES/N200114.IES.zip
http://www.jisoiluminacion.es/Ficheros_IES/N200114RGB.IES.zip